


### 15EDGKNHC-3.5

- 超薄设计，厚度仅为16.1 mm。
- 双层结构，接线密度大。
- PUSH-IN技术，接线快捷。
- UL D级电压300V,满足工业级220V的使用环境。
- Ultra-thin design with a thickness of only 16.1mm.
- Double layer structure, higher wiring density.
- Push-in connection technology for fast wiring.
- 300V voltage of UL Class D, meet the industrial 220V conditions of use.

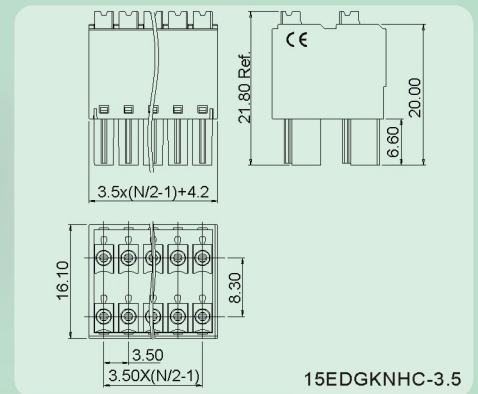

### 技术参数 Technical data

APPROVAL: CE

型号 Model	线径 Wire range (AWG/mm <sup>2</sup> )	线数 Poles	IEC61984技术参数 (IEC61984 data sheet)		UL 1059技术参数 (UL 1059 data sheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
15EDGKNHC-3.5	24-16/0.2-1.5	04-48P	250	8	300	8

### 应用行业 Application

工业自动化、电梯、电源、新能源等行业。  
Industrial automation, elevator, power supply, new energy.



### 附件 Accessory

15EDGRHB-THR-3.5



### 型号对照 Cross reference

DEGSON	同行1/Competitor1	同行2/Competitor2
15EDGKNHC-3.5	FMCD1.5/3-ST-3.5	-

### 产品订货 How to order

15EDGKNHC-3.5	0	4	P	X	X	0	0	A(H)
Series NO.	NO. of pole					Standard		
	1 Single pitch	2 Double pitch	4 Green	通用色 General Color			PANTONE 556C DEGSON 04	

### 产品包装方式 Packing

Product model	Pcs./Pkt.	Product model	Pcs./Pkt.
15EDGKNHC-3.5-04P	50	15EDGKNHC-3.5-18P	25
15EDGKNHC-3.5-06P	50	15EDGKNHC-3.5-20P	25
15EDGKNHC-3.5-08P	50	15EDGKNHC-3.5-22P	25
15EDGKNHC-3.5-10P	50	15EDGKNHC-3.5-24P	25
15EDGKNHC-3.5-12P	50		
15EDGKNHC-3.5-14P	50		
15EDGKNHC-3.5-16P	25		