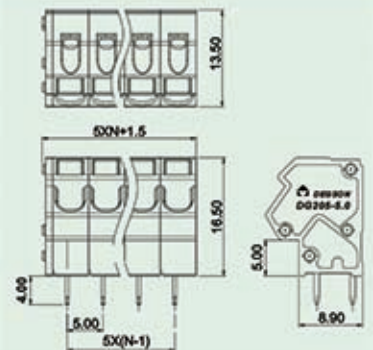


DG205-5.0

- 45°接线, 可适用于狭窄空间;
- 蝶式弹簧结构, 抗震性能好;
- 拼接结构, 线数: 02P-48P;
- 45°wiring, using with cramped space.
- Butterfly spring structure, good anti-vibration performance.
- Splice structure. Poles:02P-48P.


技术参数 Technical Data

APPROVAL: CE

型号 Model	线径 Wire range	线数 Poles	IEC60947技术参数(IEC60947 datasheet)				UL1059技术参数(UL1059 datasheet)			
			电压(V)	Rated voltage	电流(A)	Rated current	电压(V)	Rated voltage	电流(A)	Rated current
DG205-5.0	0.5-2.5mm ² /20-12AWG	02-48P	320		24		300		10	

应用行业 Application

 工业自动化、新能源、电力电气、仪器仪表、
 电梯、安防等行业。

 Industrial automation, new energy,
 electric power, instrument, elevator, security etc.

产品包装方式 Packing

Product model	Pcs./Pkt.	Product model	Pcs./Pkt.
DG205-5.0-02P	420	DG205-5.0-06P	100
DG205-5.0-03P	280	DG205-5.0-10P	80
DG205-5.0-04P	220	DG205-5.0-12P	80
DG205-5.0-05P	180	DG205-5.0-16P	60
DG205-5.0-06P	140	DG205-5.0-24P	40
DG205-5.0-07P	120	DG205-5.0-36P	20
DG205-5.0-08P	100	DG205-5.0-48P	20

型号对照 Cross Reference

DEGSON	同行1/ Competitor1	同行2/ Competitor2
DG205-5.0	254-4XX	-

产品订货 How to order

DG205-5.0	-	X	X	P	-	1	Y	-	0	0	AH
Series No.		No. of Pole							Standard		
		1 Single pitch 2 Double pitch							通用色 General Color 1 Grey PANTONE 430C DEGSON 01		