


DG636S-6.35

- 螺钉式连接技术；
- 45°进线方式，可多排布局，适用于周围布线较密及空间限制的场合。
- Screw connection technology;
- 45°wire inserting ,multiple row connection available, suitable for high density connection And narrow space.

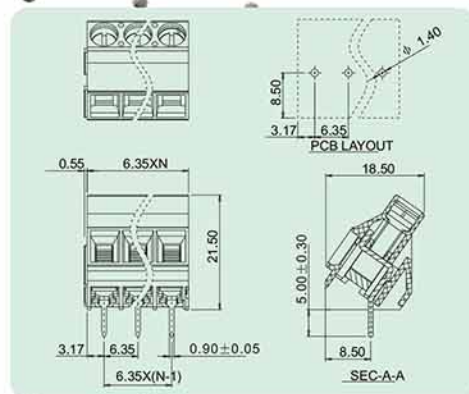

技术参数 Technical data

APPROVAL: **CE**

型号 Model	线径 Wire range (AWG/mm ²)	线数 Poles	IEC60947技术参数 (IEC60947 data sheet)		UL1059技术参数 (UL1059 data sheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DG636S-6.35	24-10/0.2-4.0	02-03P	630	32	300	30

应用行业 Application

工业自动化，仪器仪表，电梯，新能源，
电力电气，电源等行业。
Industrial automation, instrument, elevator,
new energy, electric power, power supply etc.



产品包装方式 Packing

Product model	Pcs./Pkt.
DG636S-6.35-02P	50
DG636S-6.35-03P	50

型号对照 Cross reference

DEGSON	同行1/Competitor1	同行2/Competitor2
DG636S-6.35	SMKDS5	-

产品订货 How to order

DG636S-6.35	X	X	P	1	Y	0 0 A(H) Standard
Series NO.	NO. of pole					
	1 Single pitch	2 Double pitch				
			通用色 General Color			
			1 Green	PANTONE 556C	DEGSON 04	