
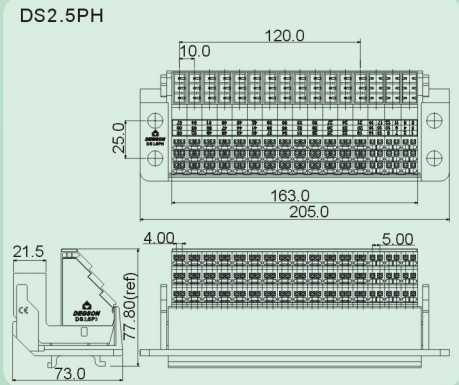


DS2.5PH/RH

- 45°进线，输入与输出90°转接，减少安装空间。
- Push-in弹片结构，快速接线，提高工作效率。
- 单极整体模块拼接。
最大线径：2.5mm²。
- 45°input line, input and output 90°to transfer, reduce installation space.
- Push-in shrapnel structure, quick wiring, improve work efficiency.
- Single pole whole module splicing.
- Maximum diameter:2.5mm².

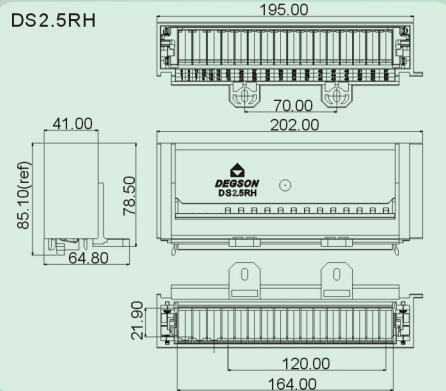

技术参数 Technical data

APPROVAL: **CE**

型号 Model	线径 Wire range (AWG/mm ²)	线数 Poles	IEC61984技术参数 (IEC61984 data sheet)		UL1059技术参数 (UL1059 data sheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DS2.5PH/RH	26-14/0.2-2.5	16P	300	13	320	20

应用行业 Application

电力电气等行业。
Electric power.



产品包装方式 Packing

Product model	Pcs./Pkt.
DS2.5PH/RH	10

型号对照 Cross reference

DEGSON	同行1/Competitor1	同行2/Competitor2
DS2.5PH/RH	-	-

产品订货 How to order

DS2.5PH/RH	-	1	6	P	-	1	1	-	0	0	A(H)
Series NO.		NO. of pole							Standard		
		1	2						通用色 General Color		
						1			Grey	PANTONE	430C
									DEGSON		01