


Products List

- BUZZER
- SIREN & SECURITY
- SPEAKER
- RECEIVER
- ELECTRET CONDENSER MICROPHONE

PRODUCTS

Home > Products Center >> BUZZER >> **SMD Buzzer** >>> SPT-1030B

Item No: SPT-1030B 10*10*3.0mm, 5200Hz, 12000pF, 70dB, 1-25Vp-P, 3mA, LCP

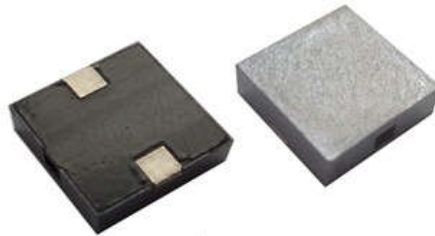

Product Resources


- Datasheet
 - CAD Model
 - Print
 - Target Quantity
- 1

Electrical Specifications:


Type	Unit	SPT-1030B-0552T
Rated Voltage(Square wave)	Vp-p	5
Operating Voltage	Vp-p	1~25
* Rated Current (Max)	mA	3
* Min sound output at 10cm	dB	70
* Resonant Frequency	Hz	5200±500Hz
Capacitance at 120Hz	pF	12000±30%
Operating Temperature	°C	-20 ~ +70
Storage Temperature	°C	-30 ~+80
Housing material/Color		PPS/BLACK
Weight	g	0.3

* Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

Dimension:

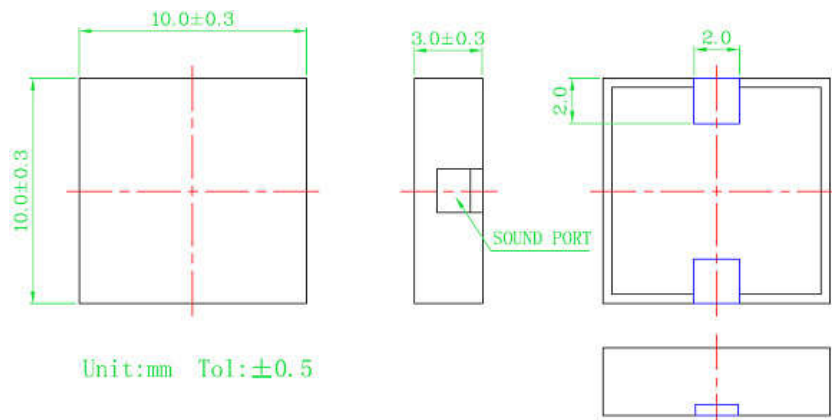

Frequency curve:

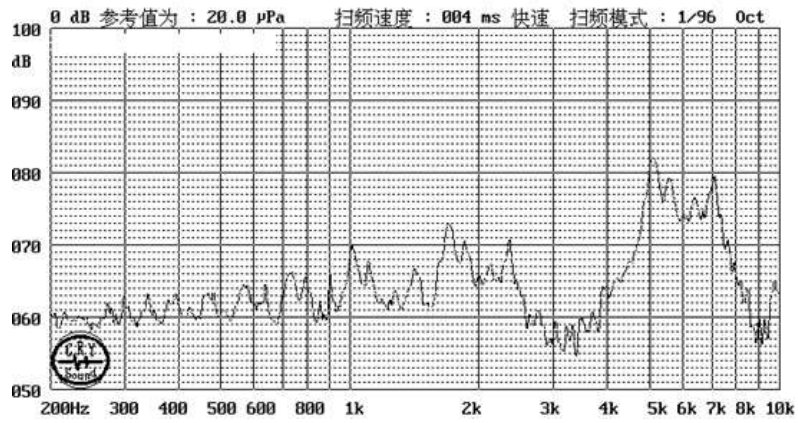

[← Previous page](#)

If you have any comments regarding our website, or would like to link to it, please contact Webmaster
© SANCO Electronics Co.,Ltd 1998 - 2003, All rights reserved.
Rm724, No.22 Lane38, Furong Road, Shangdu Mansion, Ningbo Hi-tech park, Ningbo, China
Telephone +86-574-83851068 Fax +86-574-83851096 Email: Sales@sancoelectronics.com