
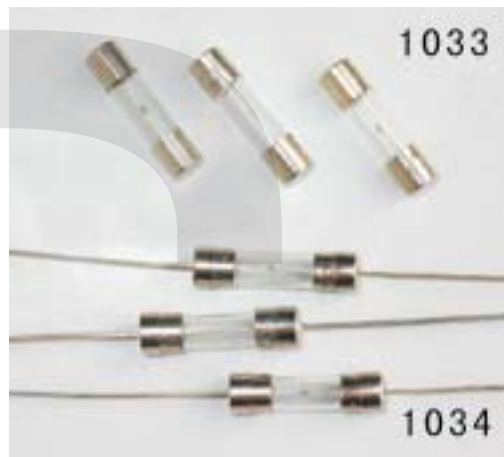


FUSE AND FUSE HOLDER


Φ5.2x20 Glass Tube Fuse Series

KLS5-1033/1034 Φ5.2x20 Glass Tube Fuse (Slow Blow) Series

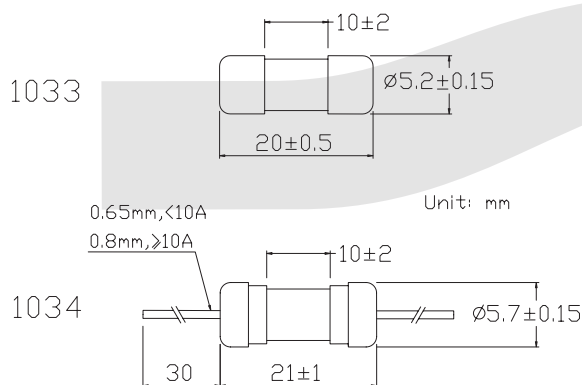

ELECTRICAL CHARACTERISTICS

RATING		32mA - 100mA	>125mA - 6.3A	8A - 15A
2.1In	Max	2 min	2 min	30 min
	Min	200 ms	600 ms	600 ms
2.75In	Max	10 s	10 s	10 s
	Min	40 ms	150 ms	150 ms
4In	Max	3 s	3 s	3 s
	Min	10 ms	20 ms	20 ms
10In	Max	300 ms	300 ms	300 ms
	Min			

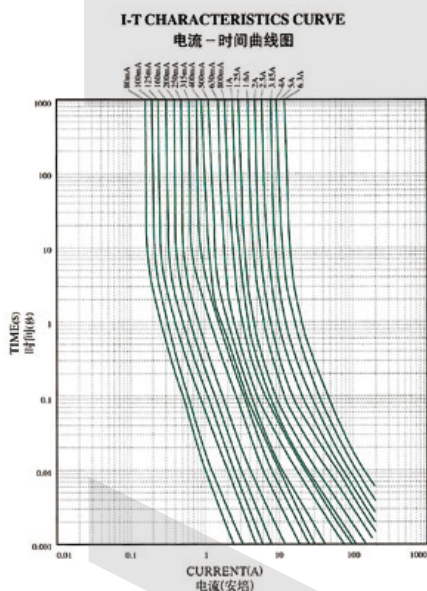

Part No.	Rated Current	Iv Voltage Drop	Rated Voltage
1034-0100	100mA	2500	125V/250V
1034-0125	125mA	2000	125V/250V
1034-0150	150mA	1900	125V/250V
1034-0160	160mA	1900	125V/250V
1034-0200	200mA	1500	125V/250V
1034-0250	250mA	1300	125V/250V
1034-0300	300mA	1100	125V/250V
1034-0315	315mA	1100	125V/250V
1034-0350	350mA	1100	125V/250V
1034-0400	400mA	1000	125V/250V
1034-0500	500mA	900	125V/250V
1034-0600	600mA	300	125V/250V
1034-0700	700mA	300	125V/250V
1034-0750	750mA	300	125V/250V
1034-0800	800mA	250	125V/250V
1034-1000	1A	150	125V/250V
1034-1200	1.2A	150	125V/250V
1034-1250	1.25A	150	125V/250V
1034-1500	1.5A	150	125V/250V
1034-1600	1.6A	150	125V/250V
1034-1800	1.8A	150	125V/250V
1034-2000	2A	150	125V/250V
1034-2500	2.5A	120	125V/250V
1034-3000	3A	100	125V/250V
1034-3150	3.15A	100	125V/250V
1034-3500	3.5A	100	125V/250V
1034-4000	4A	100	125V/250V
1034-5000	5A	100	125V/250V
1034-6000	6A	100	125V/250V
1034-6300	6.3A	100	125V/250V
1034-7000	7A	90	125V/250V
1034-8000	8A	90	125V/250V
1034-10000	10A	90	125V/250V
1034-12000	12A	90	125V/250V
1034-15000	15A	90	125V/250V

Part No.	Rated Current	Iv Voltage Drop	Rated Voltage
1033-0100	100mA	2500	125V/250V
1033-0125	125mA	2000	125V/250V
1033-0150	150mA	1900	125V/250V
1033-0160	160mA	1900	125V/250V
1033-0200	200mA	1500	125V/250V
1033-0250	250mA	1300	125V/250V
1033-0300	300mA	1100	125V/250V
1033-0315	315mA	1100	125V/250V
1033-0350	350mA	1100	125V/250V
1033-0400	400mA	1000	125V/250V
1033-0500	500mA	900	125V/250V
1033-0600	600mA	300	125V/250V
1033-0700	700mA	300	125V/250V
1033-0750	750mA	300	125V/250V
1033-0800	800mA	250	125V/250V
1033-1000	1A	150	125V/250V
1033-1200	1.2A	150	125V/250V
1033-1250	1.25A	150	125V/250V
1033-1500	1.5A	150	125V/250V
1033-1600	1.6A	150	125V/250V
1033-1800	1.8A	150	125V/250V
1033-2000	2A	150	125V/250V
1033-2500	2.5A	120	125V/250V
1033-3000	3A	100	125V/250V
1033-3150	3.15A	100	125V/250V
1033-3500	3.5A	100	125V/250V
1033-4000	4A	100	125V/250V
1033-5000	5A	100	125V/250V
1033-6000	6A	100	125V/250V
1033-6300	6.3A	100	125V/250V
1033-7000	7A	90	125V/250V
1033-8000	8A	90	125V/250V
1033-10000	10A	90	125V/250V
1033-12000	12A	90	125V/250V
1033-15000	15A	90	125V/250V

ORDER INFORMATION

Product NO.: KLS5-1033-XXXX

Rated Current
Lead Type: 1033=No Lead 1034=With Lead
Part Number