




DEGSON ELECTRONICS CO., LTD.


Product Specification



DG65H-A

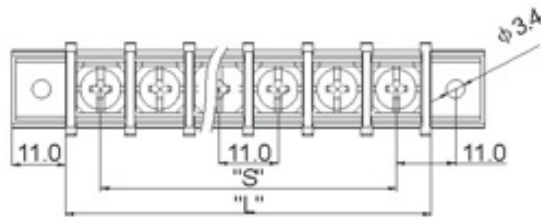


"S" = 11.0x(P-1)
 "L" = 11.0x(P-1) + 13.0

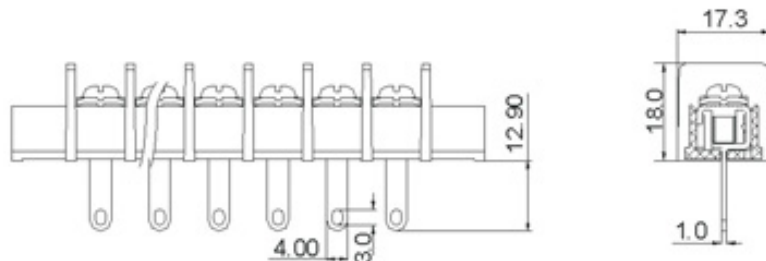

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	24.00	35.00	46.00	57.00	68.00	79.00	90.00	101.00	112.00	123.00	134.00	145.00	156.00	167.00
S(mm)	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00	110.00	121.00	132.00	143.00	154.00
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	178.00	189.00	200.00	211.00	222.00	233.00	244.00	255.00	266.00	277.00	288.00			
S(mm)	165.00	176.00	187.00	198.00	209.00	220.00	231.00	242.00	253.00	264.00	275.00			

Approval	UL	CE
Electrical		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
With standing voltage	AC2000V/1Min	
Insulation Resistance	500MΩ/DC500V	
Mechanical		
Max. Torque Value	1.2Nm 10.6Lb.in	
Ambient temperature	-40°C~+105°C	
Dimensions		
Pitch	11.0mm (.433")	
Poles	2P-20P	
Material		
Housing	PA66, UL94V-0	
Terminal	Brass, 1.0t, Tin Plated	
Screws	Steel, M4 Ni Plated	

HOW TO ORDER

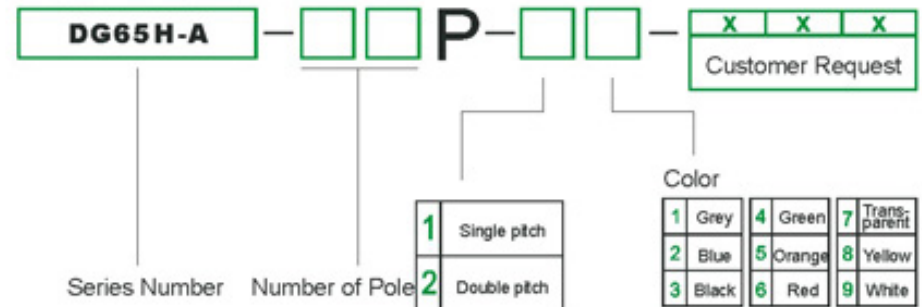

		DEGSON ELECTRONICS CO., LTD.
	NAME	DG65H-A