


KRM55WR71E476MH01K

" # " indicates a package specification code.

- Recommended
- Reflow OK
- Complies with RoHS
- Anti-noise
- Deflecting crack
- Soldering crack

< List of part numbers with package codes >
KRM55WR71E476MH01K

Shape

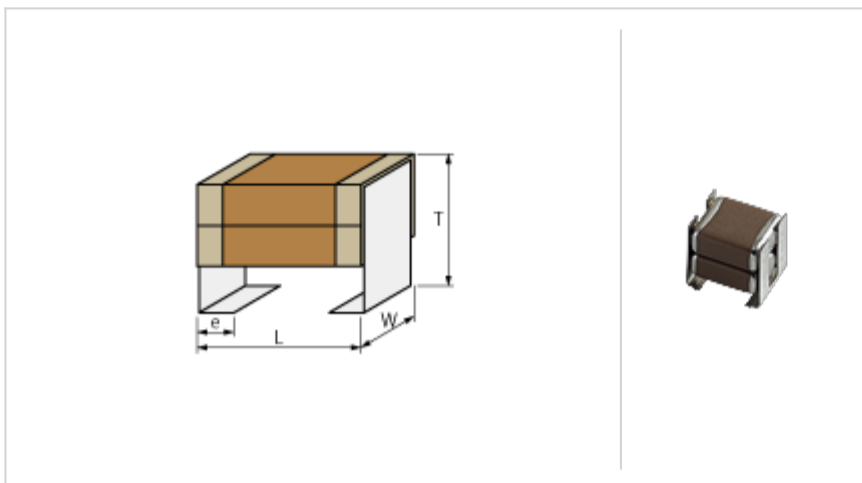

L size	6.1 ± 0.4mm
W size	5.3 ± 0.2mm
T size	6.4 ± 0.3mm
Metal terminal width e	1.2 ± 0.2mm
Size code in mm(inch)	5750 (2220)

References

Packaging	Specifications	Minimum quantity
	Embossed tape (330mm)	500

Mass (typ.)	
1 piece	900mg

Specifications

Capacitance	47µF ± 20%
Rated voltage	25Vdc
Temperature characteristics (complied standard)	X7R(EIA)
Capacitance change rate	± 15%
Temperature range of temperature characteristics	-55 to 125
Operating temperature range	-55 to 125

⚠ Attention

- This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ' s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.