


# LGJ

Snap-in Terminal Type, 105°C Low-Profile Sized

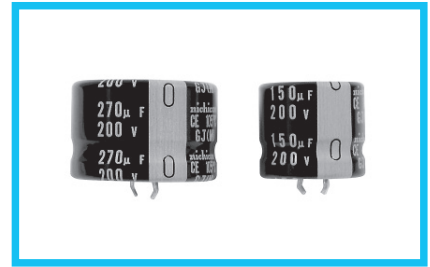


- Withstanding 3000 hours application of rated ripple current at 105°C.
- Ideally suited for flat design for switching power supply.
- Addition of 450V rated voltage.
- Compliant to the RoHS directive (2011/65/EU).

## Specifications

Item	Performance Characteristics	
Category Temperature Range	- 40 to +105°C (200 · 250V) , - 25 to +105°C (400 · 450V)	
Rated Voltage Range	200 to 450V	
Rated Capacitance Range	47 to 680µF	
Capacitance Tolerance	±20% at 120Hz, 20°C	
Leakage Current	3√CV (µA) (After 5 minutes' application of rated voltage) [C : Rated Capacitance (µF) V : Voltage (V)]	
Tangent of loss angle (tan δ)	Rated voltage(V)	200 to 400      450
	tan δ (MAX.)	0.15      0.20
Stability at Low Temperature	Measurement frequency : 120Hz	
	Rated voltage(V)	
	Impedance ratio ZT/Z20(MAX.)	Z - 25°C/Z+20°C      200 · 250      400 · 450 Z - 40°C/Z+20°C      3      8 12      —
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 3000 hours at 105°C, the peak voltage shall not exceed the rated voltage.	
	Capacitance change	tan δ
	Leakage current	Less than or equal to the initial specified value
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the requirements listed at right.	
	Capacitance change	tan δ
	Leakage current	Less than or equal to the initial specified value
Marking	Printed with white color letter on black sleeve.	


Since rating other than the above can be manufactured a please ask for detail.

## Drawing

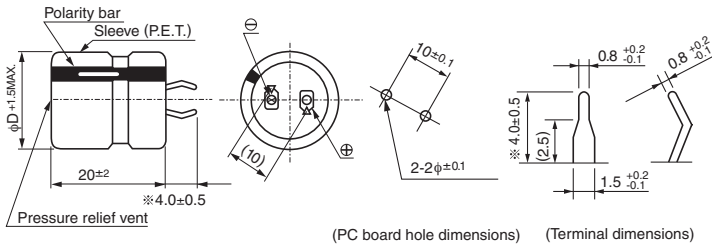

※ The other terminal is also available upon request.  
 Please refer to page 327 for schematic of terminal dimensions.

## Type numbering system (Example : 400V 120µF)

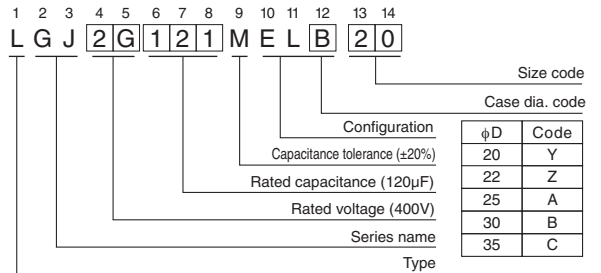

## Frequency coefficient of rated ripple current

Frequency (Hz)	50	60	120	300	1 k	10k	50k or more
200 to 250V	0.81	0.85	1.00	1.17	1.32	1.45	1.50
400 to 450V	0.77	0.82	1.00	1.16	1.30	1.41	1.43

Minimum order quantity : 50pcs.

● Dimension table in next page.



## ■ Dimensions

200V(2D)				
Cap. (μF)	Size φD × L(mm)	Rated ripple (mArms)	Leakage Current (mA)	Code
180	20 × 20	680	0.56	LGJ2D181MELY20
220	22 × 20	760	0.62	LGJ2D221MELZ20
270	22 × 20	780	0.69	LGJ2D271MELZ20
330	25 × 20	960	0.77	LGJ2D331MELA20
390	30 × 20	1080	0.83	LGJ2D391MELB20
470	30 × 20	1120	0.91	LGJ2D471MELB20
560	35 × 20	1440	1.00	LGJ2D561MELC20
680	35 × 20	1520	1.10	LGJ2D681MELC20

250V(2E)				
Cap. (μF)	Size φD × L(mm)	Rated ripple (mArms)	Leakage Current (mA)	Code
150	20 × 20	660	0.58	LGJ2E151MELY20
180	22 × 20	750	0.63	LGJ2E181MELZ20
220	25 × 20	920	0.70	LGJ2E221MELA20
270	30 × 20	1040	0.77	LGJ2E271MELB20
330	30 × 20	1080	0.86	LGJ2E331MELB20
390	35 × 20	1410	0.93	LGJ2E391MELC20
470	35 × 20	1470	1.02	LGJ2E471MELC20

400V(2G)				
Cap. (μF)	Size φD × L(mm)	Rated ripple (mArms)	Leakage Current (mA)	Code
56	20 × 20	550	0.44	LGJ2G560MELY20
68	22 × 20	620	0.49	LGJ2G680MELZ20
82	25 × 20	700	0.54	LGJ2G820MELA20
100	25 × 20	760	0.60	LGJ2G101MELA20
120	30 × 20	860	0.65	LGJ2G121MELB20
150	30 × 20	900	0.73	LGJ2G151MELB20
180	35 × 20	1160	0.80	LGJ2G181MELC20
220	35 × 20	1210	0.88	LGJ2G221MELC20

450V(2W)				
Cap. (μF)	Size φD × L(mm)	Rated ripple (mArms)	Leakage Current (mA)	Code
47	20 × 20	520	0.43	LGJ2W470MELY20
56	22 × 20	600	0.47	LGJ2W560MELZ20
68	25 × 20	670	0.52	LGJ2W680MELA20
82	25 × 20	740	0.57	LGJ2W820MELA20
100	30 × 20	830	0.63	LGJ2W101MELB20
120	30 × 20	870	0.69	LGJ2W121MELB20
150	35 × 20	1170	0.77	LGJ2W151MELC20

Rated ripple current (mArms) at 105°C 120Hz

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Nichicon:

[LGJ2C681MELC](#) [LGJ2D271MELB](#) [LGJ2E181MELA](#) [LGJ2G680MHLA](#) [LGJ2G680MELA](#) [LGJ2D271MHLB](#)  
[LGJ2D471MHLC](#) [LGJ2C681MHLC](#) [LGJ2E181MHLA](#) [LGJ2E680MELA](#) [LGJ2G470MELZ](#) [LGJ2W121MELB20](#)  
[LGJ2D471MELC](#) [LGJ2C151MELY](#) [LGJ2C181MELY](#) [LGJ2C221MELZ](#) [LGJ2C271MELA](#) [LGJ2C331MELA](#)  
[LGJ2C391MELB](#) [LGJ2C471MELB](#) [LGJ2C561MELC](#) [LGJ2Z121MELY](#) [LGJ2Z151MELY](#) [LGJ2Z181MELZ](#)  
[LGJ2Z221MELA](#) [LGJ2Z271MELA](#) [LGJ2Z331MELB](#) [LGJ2Z391MELB](#) [LGJ2Z391MELC](#) [LGJ2Z471MELC](#)  
[LGJ2Z561MELC](#) [LGJ2D101MELY](#) [LGJ2D121MELY](#) [LGJ2D151MELZ](#) [LGJ2D221MELA](#) [LGJ2D331MELB](#)  
[LGJ2D391MELC](#) [LGJ2E101MELY](#) [LGJ2E121MELZ](#) [LGJ2E151MELA](#) [LGJ2E221MELB](#) [LGJ2E271MELB](#)  
[LGJ2E331MELC](#) [LGJ2F560MELY](#) [LGJ2F680MELZ](#) [LGJ2F820MELZ](#) [LGJ2F101MELA](#) [LGJ2F121MELB](#)  
[LGJ2F151MELB](#) [LGJ2F181MELC](#) [LGJ2F221MELC](#) [LGJ2G390MELY](#) [LGJ2G560MELA](#) [LGJ2G820MELB](#)  
[LGJ2G101MELB](#) [LGJ2G121MELC](#) [LGJ2G151MELC](#) [LGJ2D181MELY20](#) [LGJ2D221MELZ20](#) [LGJ2D271MELZ20](#)  
[LGJ2D331MELA20](#) [LGJ2D391MELB20](#) [LGJ2D471MELB20](#) [LGJ2D561MELC20](#) [LGJ2D681MELC20](#)  
[LGJ2E151MELY20](#) [LGJ2E181MELZ20](#) [LGJ2E221MELA20](#) [LGJ2E271MELB20](#) [LGJ2E331MELB20](#)  
[LGJ2E391MELC20](#) [LGJ2E471MELC20](#) [LGJ2G101MELA20](#) [LGJ2G121MELB20](#) [LGJ2G151MELB20](#)  
[LGJ2G181MELC20](#) [LGJ2G221MELC20](#) [LGJ2G560MELY20](#) [LGJ2G680MELZ20](#) [LGJ2G820MELA20](#)  
[LGJ2W101MELB20](#) [LGJ2W151MELC20](#) [LGJ2W470MELY20](#) [LGJ2W560MELZ20](#) [LGJ2W680MELA20](#)  
[LGJ2W820MELA20](#)