



SEMITRANS® 3

SKM300GB12V

Features


- V-IGBT = 6. Generation Trench V-IGBT (Fuji)
- CAL4 = Soft switching 4. Generation CAL-diode
- Isolated copper baseplate using DBC technology (Direct Copper Bonding)
- UL recognized, file no. E63532
- Increased power cycling capability
- With integrated gate resistor
- Low switching losses at high di/dt

Typical Applications*

- AC inverter drives
- UPS
- Electronic welders

Remarks

- Case temperature limited to $T_c = 125^\circ\text{C}$ max, recomm. $T_{op} = -40 \dots +150^\circ\text{C}$, product rel. results valid for $T_j = 150^\circ$



GB

Absolute Maximum Ratings

Symbol	Conditions	Values	Unit
IGBT			
V_{CES}	$T_j = 25^\circ\text{C}$	1200	V
I_C	$T_j = 175^\circ\text{C}$	$T_c = 25^\circ\text{C}$	420
		$T_c = 80^\circ\text{C}$	319
I_{Cnom}		300	A
I_{CRM}	$I_{CRM} = 3 \times I_{Cnom}$	900	A
V_{GES}		-20 ... 20	V
t_{psc}	$V_{CC} = 720\text{ V}$ $V_{GE} \leq 20\text{ V}$ $V_{CES} \leq 1200\text{ V}$	$T_j = 125^\circ\text{C}$	10
T_j		-40 ... 175	$^\circ\text{C}$
Inverse diode			
I_F	$T_j = 175^\circ\text{C}$	$T_c = 25^\circ\text{C}$	353
		$T_c = 80^\circ\text{C}$	264
I_{Fnom}		300	A
I_{FRM}	$I_{FRM} = 3 \times I_{Fnom}$	900	A
I_{FSM}	$t_p = 10\text{ ms, sin } 180^\circ, T_j = 25^\circ\text{C}$	1548	A
T_j		-40 ... 175	$^\circ\text{C}$
Module			
$I_{t(RMS)}$	$T_{terminal} = 80^\circ\text{C}$	500	A
T_{stg}		-40 ... 125	$^\circ\text{C}$
V_{isol}	AC sinus 50Hz, $t = 1\text{ min}$	4000	V

Characteristics

Symbol	Conditions	min.	typ.	max.	Unit
IGBT					
$V_{CE(sat)}$	$I_C = 300\text{ A}$ $V_{GE} = 15\text{ V}$ chipelevel				$T_j = 25^\circ\text{C}$
					$T_j = 150^\circ\text{C}$
V_{CE0}					$T_j = 25^\circ\text{C}$
					$T_j = 150^\circ\text{C}$
r_{CE}	$V_{GE} = 15\text{ V}$				$T_j = 25^\circ\text{C}$
					$T_j = 150^\circ\text{C}$
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 12\text{ mA}$	5.5	6	6.5	V
I_{CES}	$V_{GE} = 0\text{ V}$ $V_{CE} = 1200\text{ V}$				$T_j = 25^\circ\text{C}$
					$T_j = 150^\circ\text{C}$
C_{ies}	$V_{CE} = 25\text{ V}$ $V_{GE} = 0\text{ V}$				$f = 1\text{ MHz}$
C_{oes}					$f = 1\text{ MHz}$
C_{res}					$f = 1\text{ MHz}$
Q_G	$V_{GE} = -8\text{ V} \dots +15\text{ V}$		3310		nC
R_{Gint}			2.5		Ω
$t_{d(on)}$	$V_{CC} = 600\text{ V}$				$T_j = 150^\circ\text{C}$
t_r	$I_C = 300\text{ A}$				$T_j = 150^\circ\text{C}$
E_{on}	$V_{GE} = \pm 15\text{ V}$				$T_j = 150^\circ\text{C}$
$t_{d(off)}$	$R_{G on} = 2.5\ \Omega$				$T_j = 150^\circ\text{C}$
t_f	$R_{G off} = 2.5\ \Omega$				$T_j = 150^\circ\text{C}$
E_{off}	$di/dt_{on} = 7700\text{ A}/\mu\text{s}$ $di/dt_{off} = 3500\text{ A}/\mu\text{s}$ $du/dt_{off} = 7500\text{ V}/\mu\text{s}$				$T_j = 150^\circ\text{C}$
$R_{th(j-c)}$	per IGBT			0.11	K/W



SEMITRANS® 3

SKM300GB12V

Features

- V-IGBT = 6. Generation Trench V-IGBT (Fuji)
- CAL4 = Soft switching 4. Generation CAL-diode
- Isolated copper baseplate using DBC technology (Direct Copper Bonding)
- UL recognized, file no. E63532
- Increased power cycling capability
- With integrated gate resistor
- Low switching losses at high di/dt


Typical Applications*

- AC inverter drives
- UPS
- Electronic welders

Remarks

- Case temperature limited to $T_c = 125^\circ\text{C}$ max, recomm.
 $T_{op} = -40 \dots +150^\circ\text{C}$, product rel. results valid for $T_j = 150^\circ$

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
Inverse diode						
V _F = V _{EC}	I _F = 300 A	T _j = 25 °C		2.17	2.49	V
	V _{GE} = 0 V chip	T _j = 150 °C		2.11	2.42	V
V _{F0}		T _j = 25 °C		1.3	1.5	V
		T _j = 150 °C		0.9	1.1	V
r _F		T _j = 25 °C		2.9	3.3	mΩ
		T _j = 150 °C		4.0	4.4	mΩ
I _{RRM}	I _F = 300 A	T _j = 150 °C		350		A
Q _{rr}	di/dt _{off} = 8500 A/μs	T _j = 150 °C		45		μC
E _{rr}	V _{GE} = ±15 V	T _j = 150 °C		21		mJ
	V _{CC} = 600 V					
R _{th(j-c)}	per diode				0.17	K/W
Module						
L _{CE}				15	20	nH
R _{CC'+EE'}	terminal-chip	T _C = 25 °C		0.25		mΩ
		T _C = 125 °C		0.5		mΩ
R _{th(c-s)}	per module			0.02	0.038	K/W
M _s	to heat sink M6		3		5	Nm
M _t		to terminals M6	2.5		5	Nm
						Nm
w					325	g

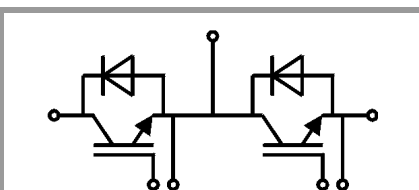

GB

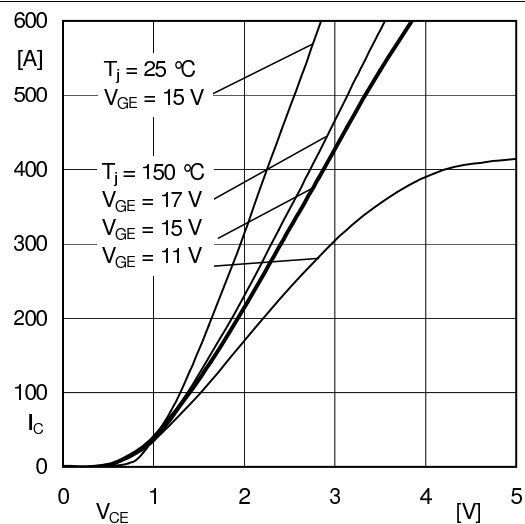


Fig. 1: Typ. output characteristic, inclusive $R_{CC'+EE'}$

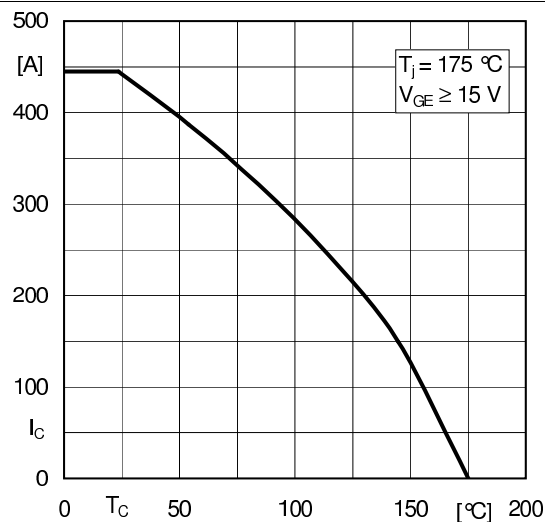


Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

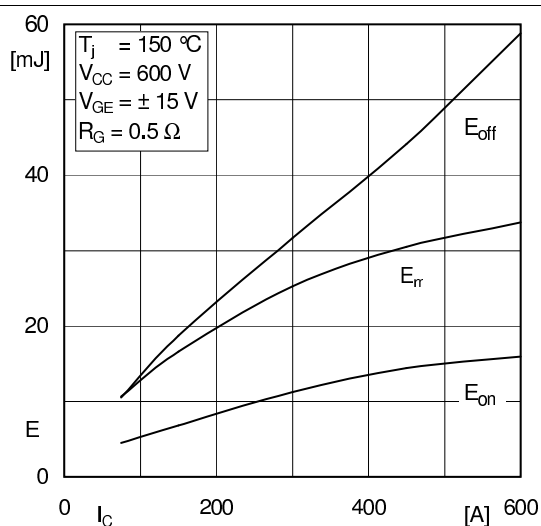


Fig. 3: Typ. turn-on /-off energy = $f(I_C)$

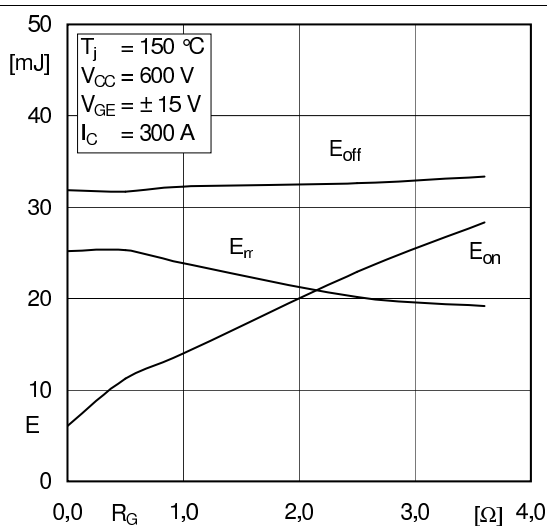


Fig. 4: Typ. turn-on /-off energy = $f(R_G)$

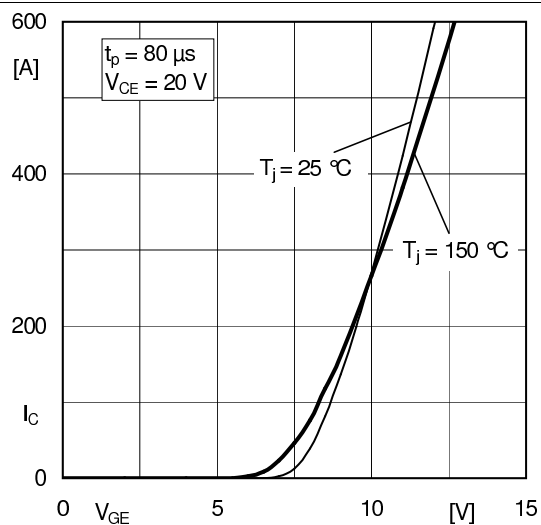


Fig. 5: Typ. transfer characteristic









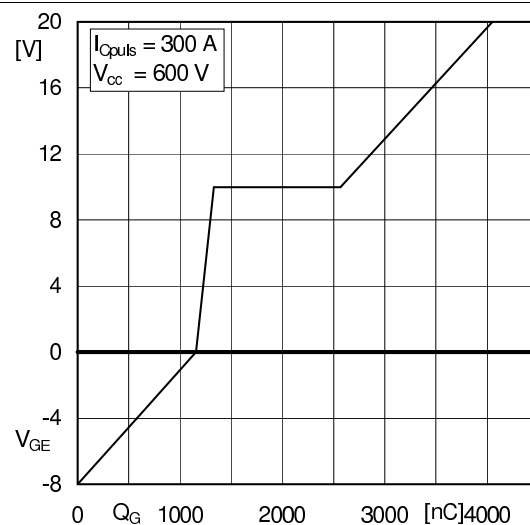


Fig. 6: Typ. gate charge characteristic

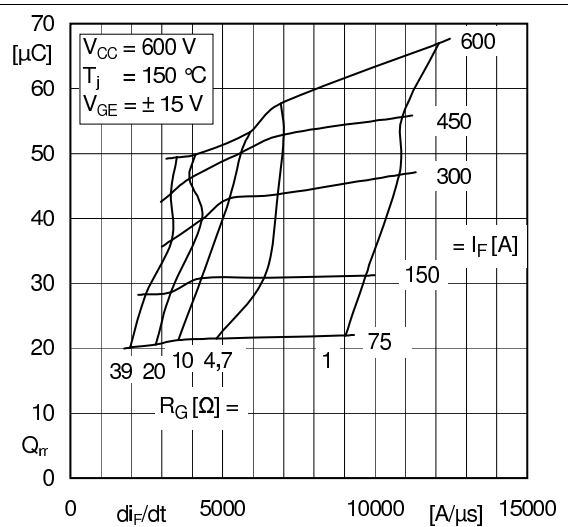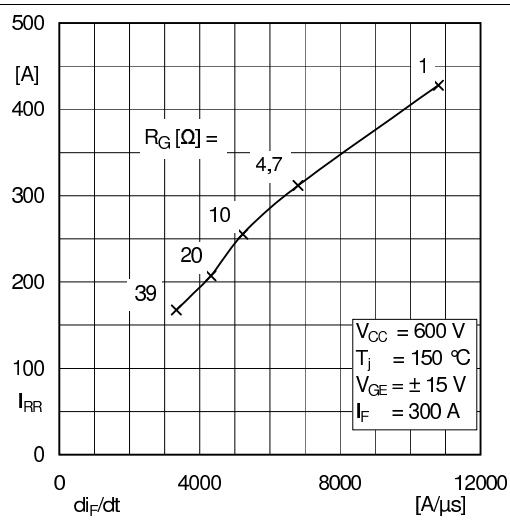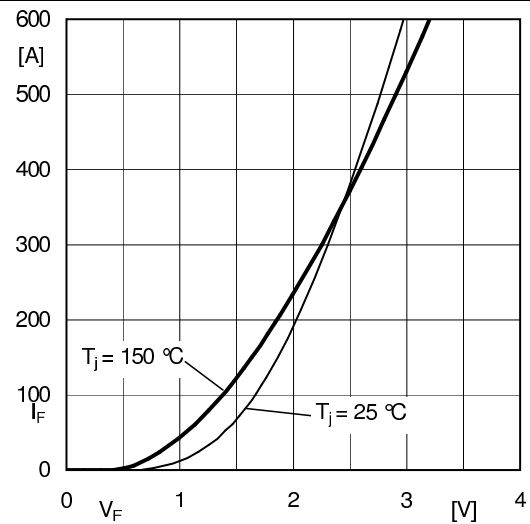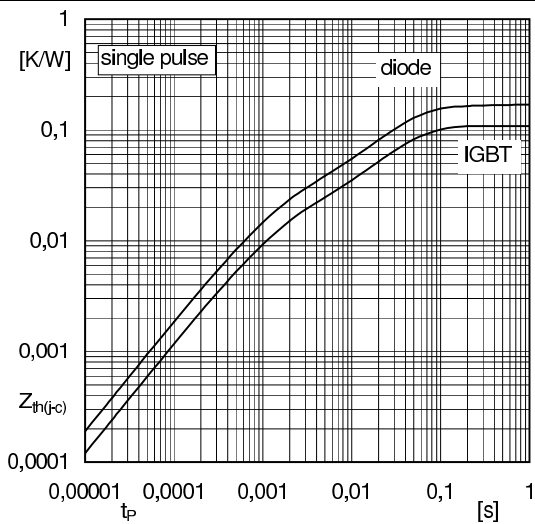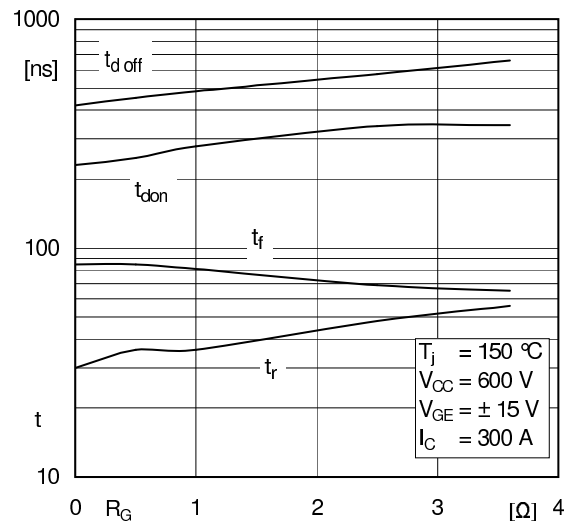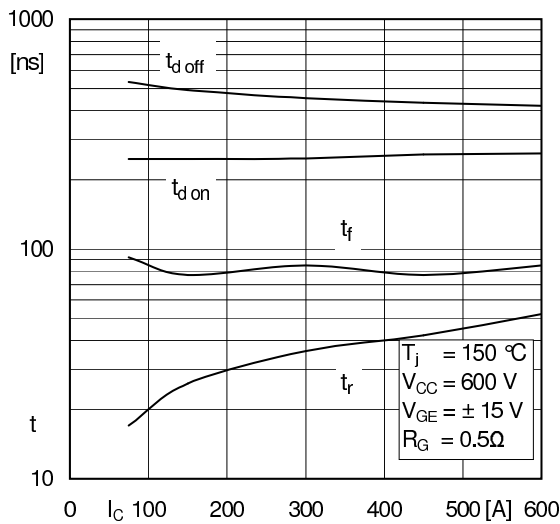

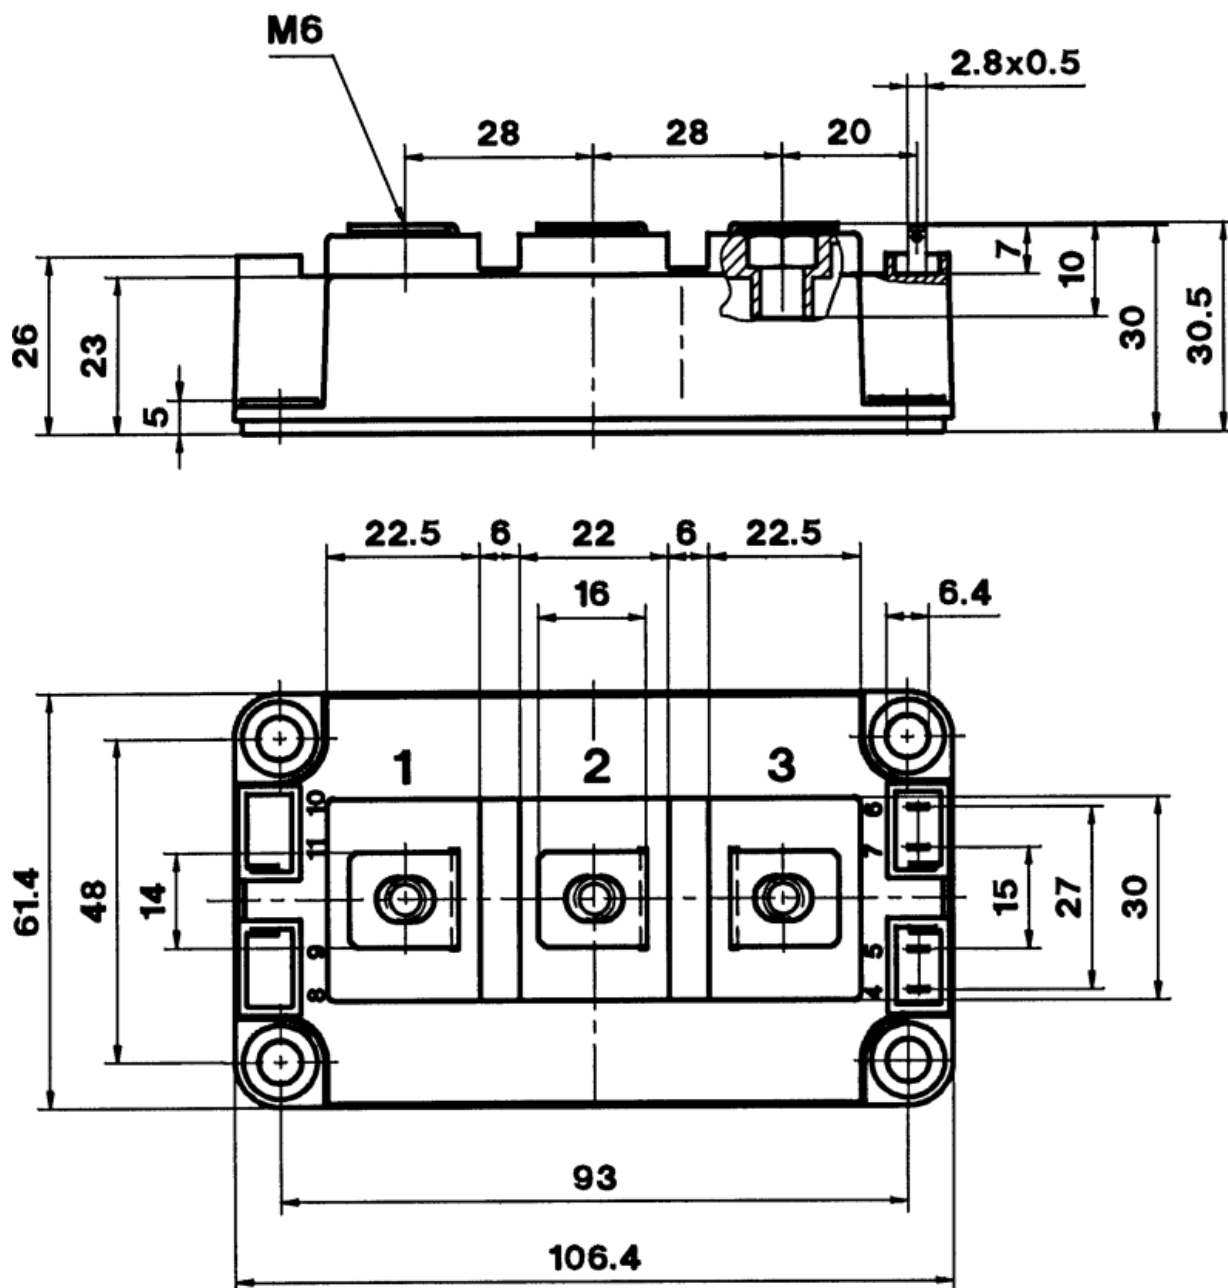

SEMITRANS 3

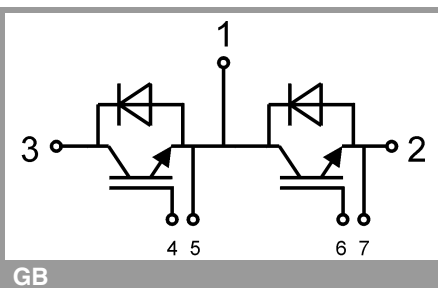

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.