


Glass Passivated Single-Phase Bridge Rectifier

Major Ratings and Characteristics

$I_{F(AV)}$	2.0 A
V_{RRM}	50 V to 1000 V
I_{FSM}	60 A
I_R	5.0 μ A
V_F	1.1 V
T_j max.	150 °C

Case Style WOG

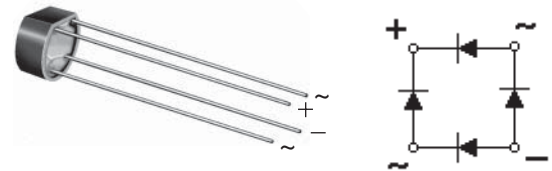

Features

- UL Recognition, file number E54214
- Ideal for printed circuit boards
- Typical I_R less than 0.5 μ A
- High case dielectric strength
- High surge current capability
- Solder Dip 260 °C, 40 seconds



Mechanical Data

Case: WOG

Epoxy meets UL-94V-0 Flammability rating

Terminals: Silver plated (E4 Suffix) leads, solderable per J-STD-002B and JESD22-B102D

Polarity: As marked on body

Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for Power Supply, Adapter, Charger, lighting Ballaster on Consumers and Home Appliances applications

Maximum Ratings

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	2W005G	2W01G	2W02G	2W04G	2W06G	2W08G	2W10G	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at 0.375" (9.5 mm) lead length (See Fig. 1)	$I_{F(AV)}$	2.0							A
Peak forward surge current single sine-wave superimposed on rated load	I_{FSM}	60							A
Rating for fusing ($t < 8.3$ ms)	I^2t	15							A ² sec
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to + 150							°C

Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Test condition	Symbols	2W005G	2W01G	2W02G	2W04G	2W06G	2W08G	2W10G	Units
Maximum instantaneous forward voltage drop per leg	at 2.0 A	V_F	1.1							V
Maximum DC reverse current at rated DC blocking voltage per leg	$T_A = 25\text{ °C}$ $T_A = 125\text{ °C}$	I_R	5.0 500							μA
Typical junction capacitance per leg	at 4.0 V, 1 MHz	C_J	40			20				pF

Thermal Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	2W005G	2W01G	2W02G	2W04G	2W06G	2W08G	2W10G	Units
Typical thermal resistance per leg ⁽¹⁾	$R_{\theta JA}$ $R_{\theta JL}$					40			$^{\circ}\text{C/W}$
						15			

Notes:

(1) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5 mm) lead length P.C.B. mounting

Ratings and Characteristics Curves

($T_A = 25\text{ °C}$ unless otherwise noted)

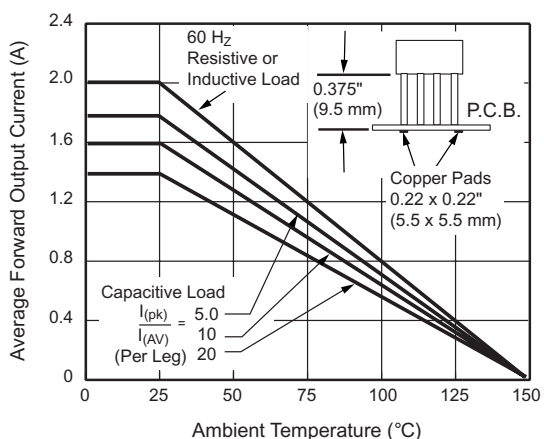


Figure 1. Derating Curve Output Rectified Current

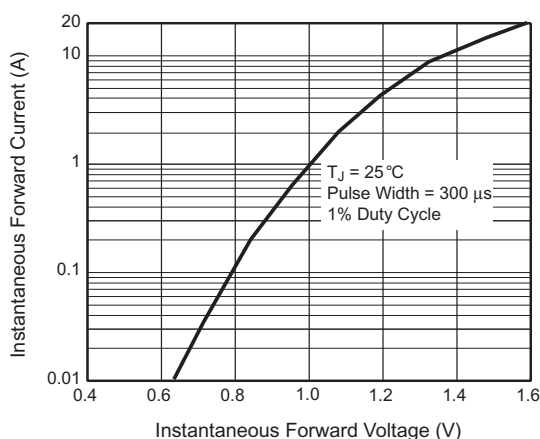


Figure 3. Typical Forward Characteristics Per Leg

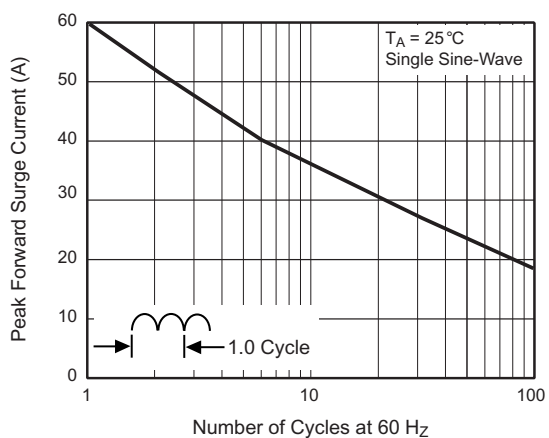


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

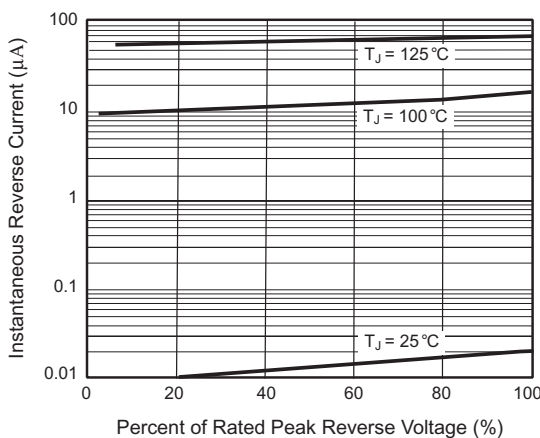


Figure 4. Typical Reverse Leakage Characteristics Per Leg

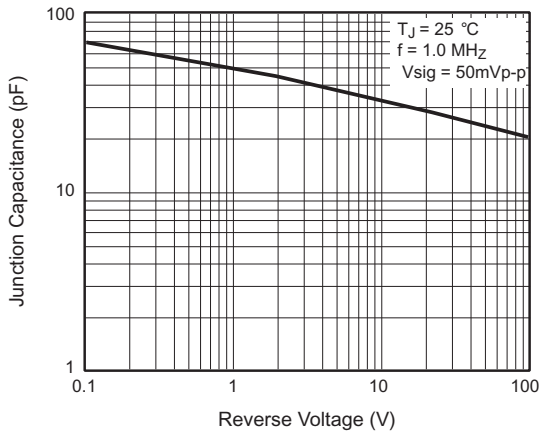


Figure 5. Typical Junction Capacitance Per Leg


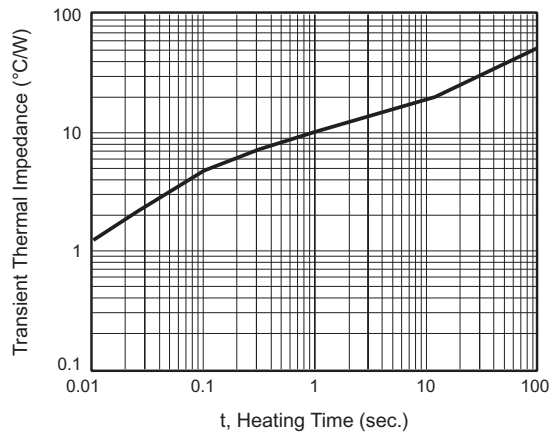


Figure 6. Typical Transient Thermal Impedance

Package outline dimensions in inches (millimeters)



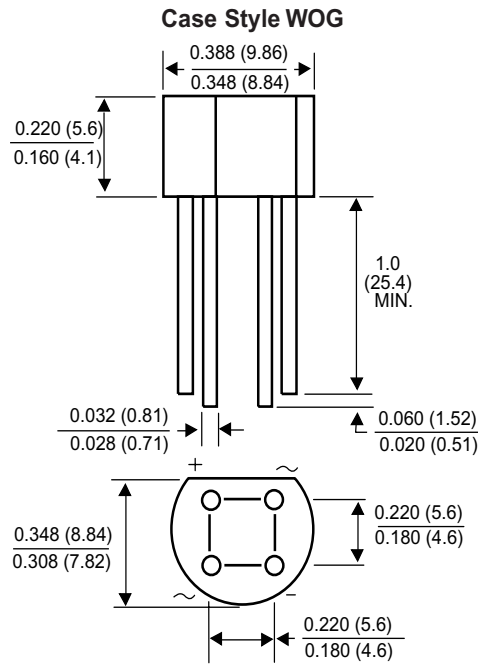

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.